


# DES DIVIA-Anschlussbox

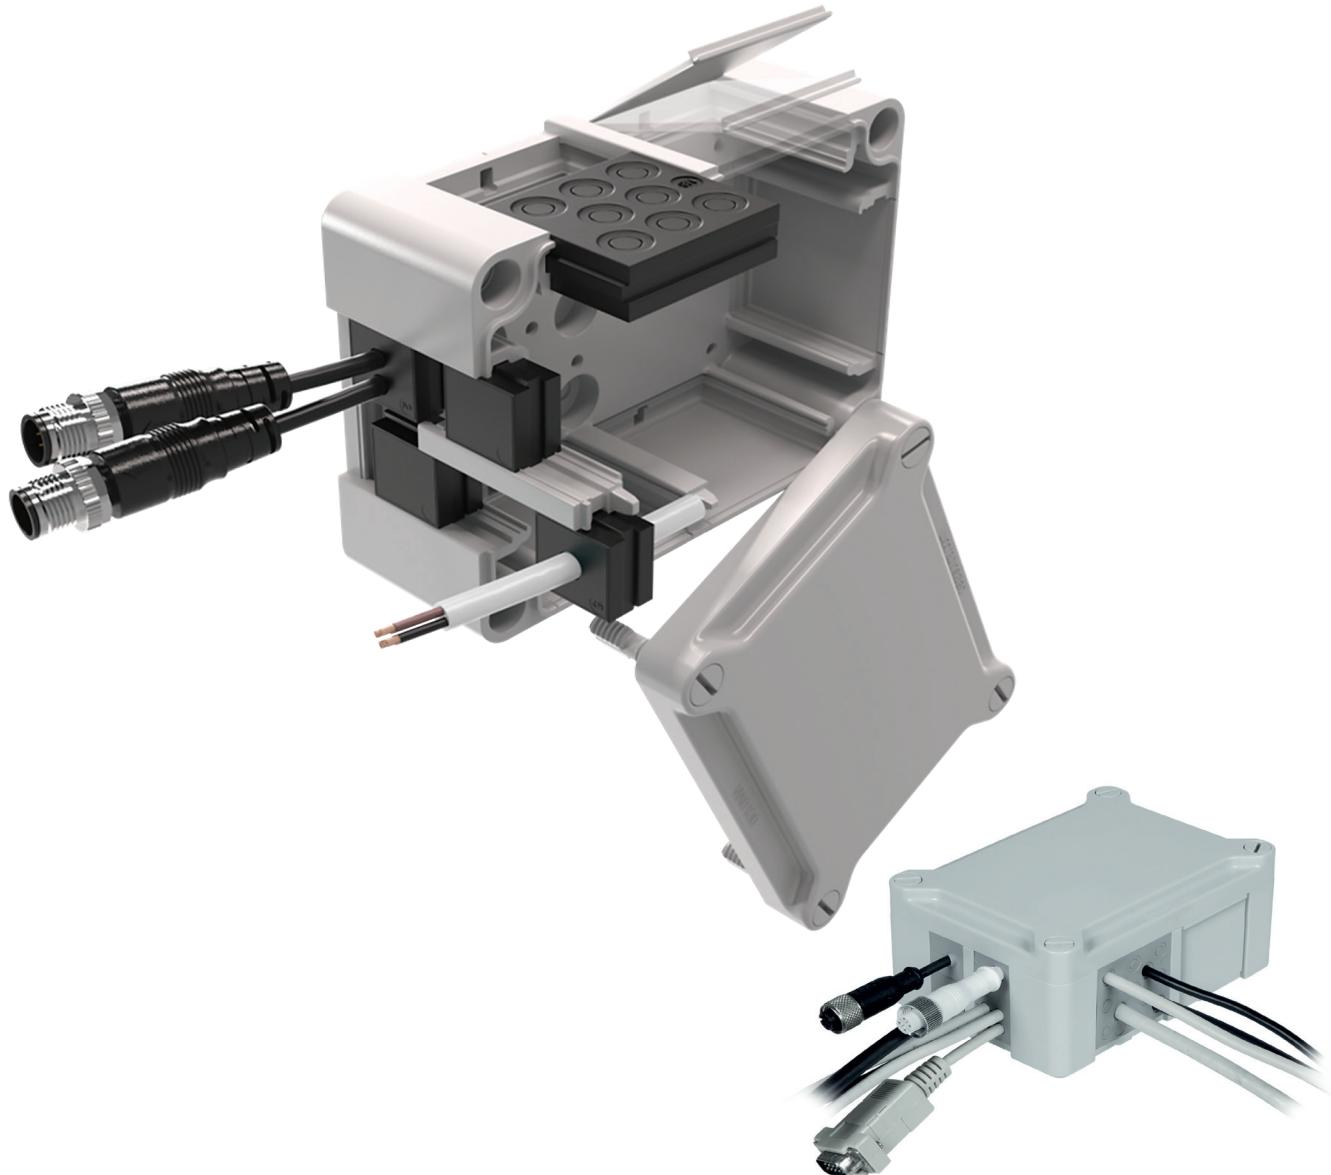

Für Kabel mit und ohne Stecker  
Möglichkeit zum Einbau von  
Kabeltüllen von 5 Seiten  
Große Platzersparnis und Zeitersparnis  
Schutzart IP66 oder IP54 mit eingesetzten  
Kabeltüllen





# DES DIVIA-Anschlussbox

Die Verteilerbox DES DIVIA wurde entwickelt, um die Durchführung von Kabeln mit und ohne Stecker in Industrieanwendungen zu vereinfachen. Sie nutzt abnehmbare Wände und Kabeldurchführungen und bietet so neue Anschlussmöglichkeiten im Vergleich zu herkömmlichen Kabelverschraubungen. Zur Verwendung mit Kabeldurchführungen des Typs SPC und SPL.

## Technische Daten:

- Große Platzersparnis und Zeitersparnis
- Schneller und einfacher Anschluss
- Möglichkeit zur sofortigen Konfiguration vor Ort
- Abnehmbare Wände
- Für Kabel mit einem Durchmesser von 2...35 mm
- Möglichkeit zur Einführung von Kabeldurchführungen aus 5 Seiten
- Für bis zu 96 Kabel, auch mit Steckern
- Selbstverlöschend gemäß UL94-V0
- Betriebstemperatur -40...+130 °C (statisch)
- Halogen- und silikonfrei
- Schutzart IP66 oder IP54 mit eingesetzten Kabeltüllen
- Geeignet für DIN-Schiene TH35, TH15
- Abmessungen 130 x 94 x 62 mm

Abmessungen in mm:

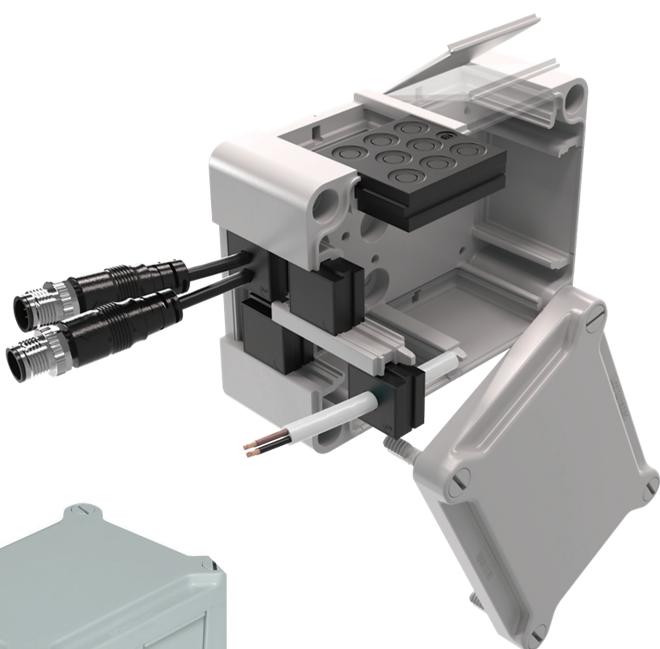

DES DIVIA

**IP54**  
**IP66**

**NEMA  
12, 4X\***

**UL TYPE  
12, 4X**

**UL94-V0**

**UV  
ISO 4892-2A**

**RoHS  
COMPLIANT**

**IK10**

## DES DIVIA-Anschlussbox

 **DETASULTRA**  
solutions around the cable

Type	Art. Nr.	Abmessungen mm	Stk./Pkg.
DES DIVIA 130.94A	1731613094	130 x 94 x 62	1



# DES DIVIA

Junction box for cable with and without connectors



## CARATTERISTICHE

- Removable walls on four sides of the box
- IP66 (IP54 with grommets inserted)
- Fixing at the corner and at the bottom of the box
- Screws with fall protection included
- Cable entry also from below
- Configurable with the entire range of SPC and SPL cable grommets

The new DES DIVIA junction box is designed to simplify and expedite the routing of pipes, conduits, and cables with or without connectors in industrial environments. It utilizes removable walls and openable or piercable cable grommets, offering new wiring possibilities compared to traditional cable glands.

**Materiale:** PC, halogens and silicones free




**Flammability:** self-extinguishing acc. to UL94-V0

**Temperature:** -40°C... +130°C (static)




Model	Code	Dimensions (mm)	Pcs (/pack)
DES DIVIA 130.94A	1731613094	130 x 94 x 62	1

## Dimensioni (mm)

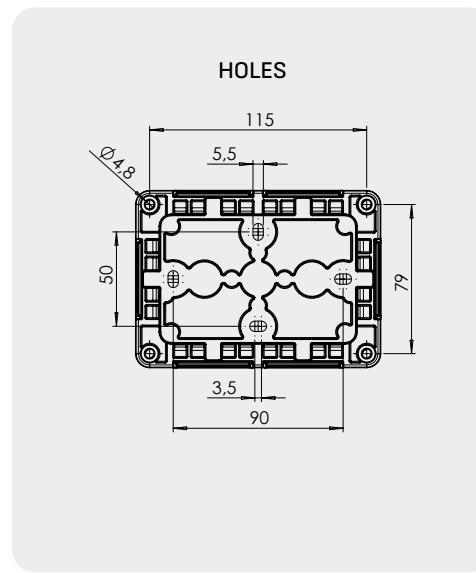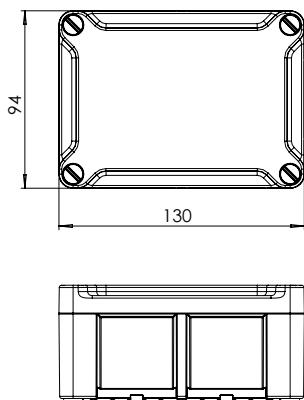

## INTERNAL VIEW



Suitable for  
DIN TH15 and TH35 bars

\* Indoor only

IP54  
IP66

NEMA  
12, 4X\*

UL TYPE  
12, 4X

UL94-V0

UV  
ISO 4892-2A

RoHS  
COMPLIANT

IK10




# DES DIVIA

Junction box for cable with and without connectors



DES DIVIA allows to remove the walls **(1)** depending on the wiring requirements. In each opening, it is possible to insert one SPL **(2)** grommet for cables up to 31mm diameter, or 4 SPC **(3)** grommets for cables up to 15mm diameter, thanks to the included grommets separators **(4)**.

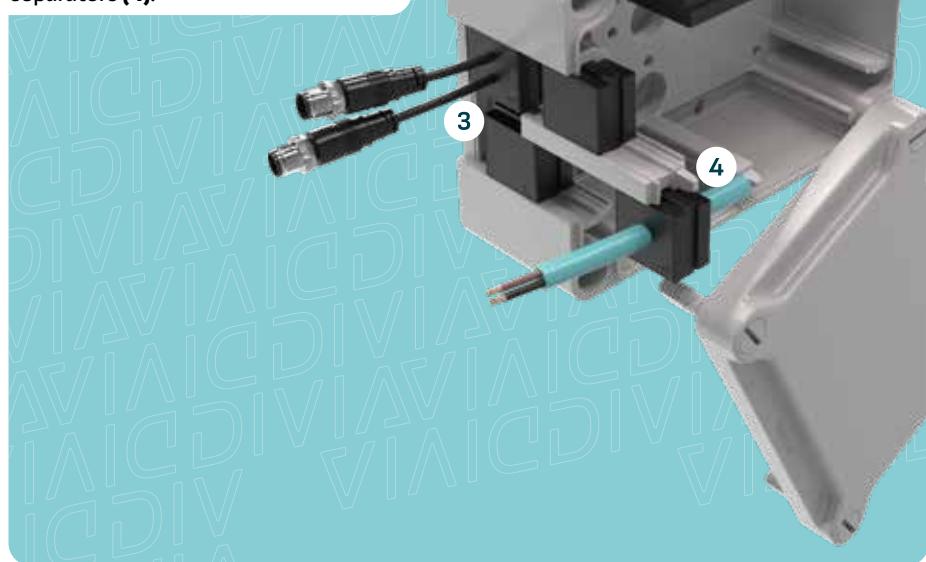

\* Indoor only

**IP54**  
**IP66**

**NEMA  
12, 4X\***  
**UL TYPE  
12, 4X**

**UL94-V0**

**UV  
ISO 4892-2A**

**RoHS  
COMPLIANT**

**IK10**