


Magnetschalter - Reed - 2-Leiter - Schließer Tmax. +140°C

Kenndaten

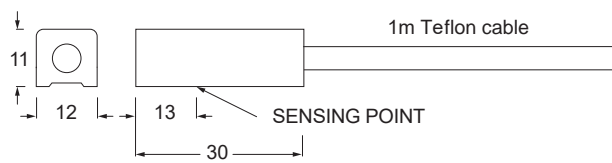

MODEL	KT-31R-1M
Connect Diagram	
Characteristics	
Wiring Method	2-Wire Type
Switching Logic	SPST, Normally Open
Sensor Type	Reed Switch
Operating Voltage	5 ~ 240 V DC / AC
Switching Current	500 mA max.
Contact Rating ※1	10 W max.
Current Consumption ※2	-
Voltage Drop ※2	0.5 V max.
Leakage Current ※2	-
Indicator	-
Lead Wire	Ø3 Teflon - 24 AWG (0.22 mm ²) - 2 cores
Operating Frequency	200 Hz
Magnet Requirement ※2, 3	40 Gauss
Temperature Range	-10 ~ 140 °C
Shock ※4	30 G
Vibration ※5	9 G
Enclosure	IEC 60529 IP67
Protection Circuit ※6	1

NOTE

※1 : WARNING : Never exceed rating (Watt = Voltage × Amperage).
Permanent damage to sensor will occur.

※2 : It bases on conditions of voltage 24 V DC, ambient temp. 25 °C and 2 meters cable of sensor. Voltage drop increases in pace with cable length.


※3 : Measuring standard target : Ø15.5 × Ø8 × 5t (Anisotropy rubber magnet)

※4 : Sin wave / X, Y, Z 3 directions / 3 times each direction / 11 ms each time.

※5 : Double amplitude 1.5 mm / 10 Hz ~ 55 Hz ~ 10 Hz (Sweep 1 min) / X, Y, Z 3 directions / 1 hour each time.

※6 : 1 = None / 2 = Short-circuit / 3 = Power Source Reverse polarity / 4 = Surge Suppression

Bracket

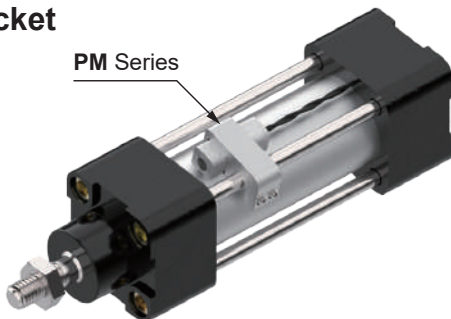

Bestelldaten

KT-31R-1M

Reed-Schalter, 2-Leiter, Schließer, 1m Teflon-Kabel, +140°C

C+R Automations- GmbH

Nürnberger Straße 45
90513 Zirndorf

Tel. +49 (0)911 656587-0
Fax +49 (0)911 656587-99

E-Mail: info@crautomation.de
www.crautomation.de

Änderungen vorbehalten